

SPECIFICATIONS:

NATURAL GALVANIZED (Standard): Shall be of 2 3/8" O.D. (.130 wall) RS40 high tensile galvanized steel pipe with welds cold galvanized and finish painted with a durable outdoor aluminum enamel.


POWDER COAT (add **-PC** to model number): Shall be of 2 3/8" O.D. (.130 wall) RS40 high tensile galvanized steel pipe with baked-on polyester powder. Choice of Black, Bronze, Blue, Red, or Green. Other colors are available upon request (additional charge may apply).

HOT DIPPED GALVANIZED (add **-G** to modal number): Shall be of 2 3/8" O.D. (.154 wall) schedule 40 steel pipe hot dipped galvanized after fabrication as per ASTM specifications. Drain holes shall be drilled to allow the galvanizing to flow through the pipe and coat all surfaces inside and out for full rust resistance. Hot dipped galvanizing is reserved for large quantities only.

STAINLESS STEEL (add **-SS** to modal number): Shall be of 2 3/8" O.D. schedule 40 stainless steel pipe.

NOTE: Add **-SM** to model number for surface mount model. Additional charge for surface mount flanges.

- All welded seams (if any) ground smooth for a continuous, one-piece bike rack.
- All loops bent on 6" centerline radius.

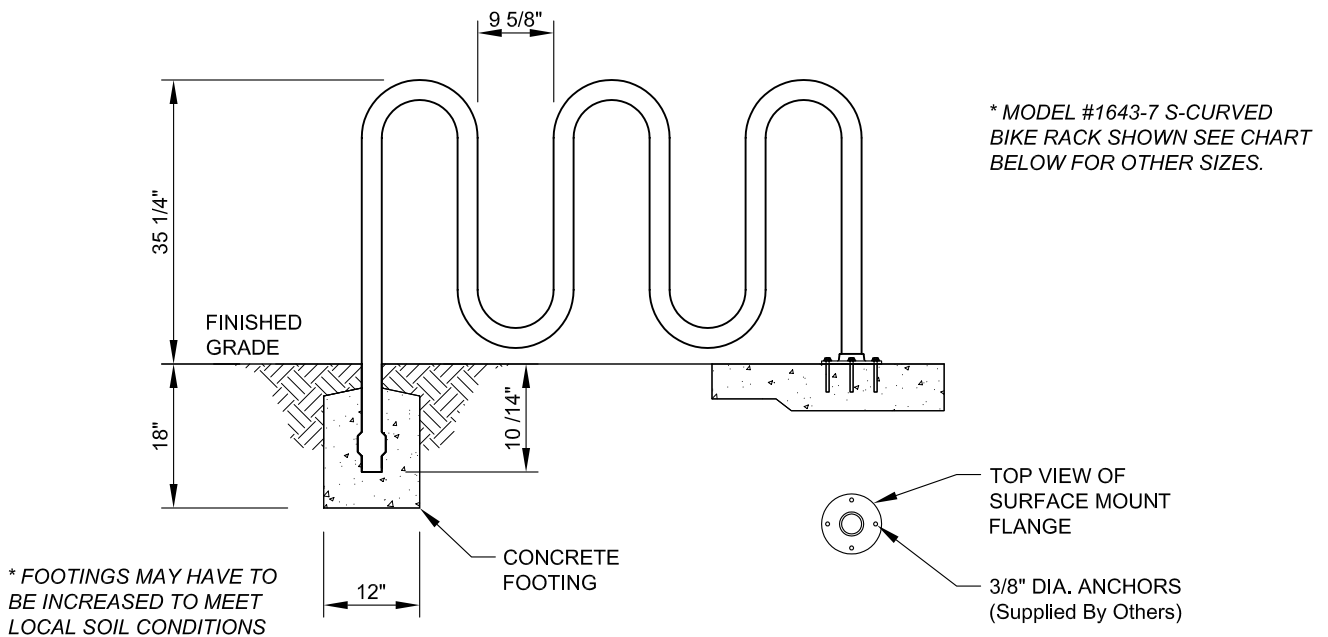

PERMANENT MOUNT OPTION

SURFACE MOUNT OPTION

MODEL NO.	CAPACITY	LENGTH	CONFIGURATION
#1643-2	2 BIKES	1'-3"	
#1643-5	5 BIKES	3'-3"	
#1643-7	7 BIKES	5'-3"	
#1643-9	9 BIKES	7'-3"	
#1643-11	11 BIKES	9'-3"	
#1643-13	13 BIKES	11'-3"	

FINISH OPTIONS:

- NATURAL GALVANIZED
- POWDER COATED
- HOT DIPPED GALVANIZED
- STAINLESS STEEL

FINISH OPTIONS:

- PERMANENT/IN-GROUND (Standard)
- SURFACE MOUNT (Anchors by Others)



11800 East 9 Mile Road
Warren, MI 48089
Office: (586) 486-1088
Fax: (586) 754-9130
Toll Free: (800) 657-6118
Email: info@coverworx.net
www.CoverWorx.net

COVERWORX EXTRAS

**1643 S-CURVED BIKE RACK
DESIGN SPECIFICATIONS**