


SPECIFICATIONS:

FRAME: Shall be of 1 5/16" O.D. schedule 40 steel curved pipe permanently welded to a 16" long x 1 3/4" wide x 1/8" thick mounting plate. Anchor holes are provided for mounting to wall surface (anchors supplied by others).

POWDER COAT (add -PC to model number): Baked-on polyester powder coat in Black. Other colors are available upon request (additional charge may apply).

HOT DIPPED GALVANIZED (add -G to modal number): Shall be hot dipped galvanized after fabrication as per ASTM specifications. Drain holes shall be drilled to allow the galvanizing to flow through the pipe and coat all surfaces inside and out for full rust resistance.

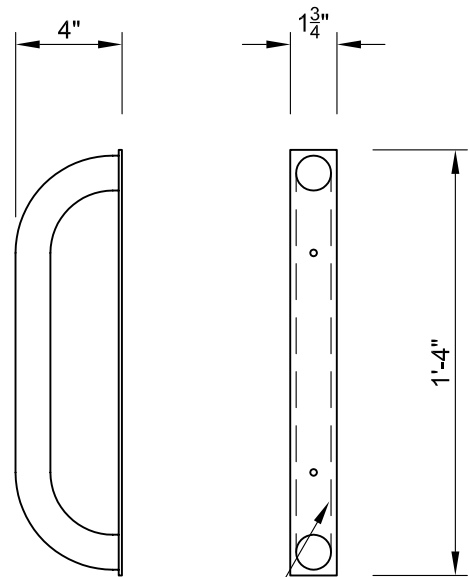

1/4" DIA. ANCHORS
(Supplied By Others)



11800 East 9 Mile Road
Warren, MI 48089
Office: (586) 486-1088
Fax: (586) 754-9130
Toll Free: (800) 657-6118
Email: info@coverworx.net
www.CoverWorx.net

COVERWORX EXTRAS

1660 WALLRACK
DESIGN SPECIFICATIONS