Model: Steelworx Gable Kiosk Shelter, 2' x 6', Model # KG-0206-SW

Manufacturing Mission: To provide all prefabricated components and installation instructions for a 2' wide (measured from eave to eave) by 6' long free standing bolt together, tubular steel constructed shelter kit.

Design Criteria: Structure is typically designed for a 30 lb live load and a 95 mph wind load capacity. All structural members are ASTM A-500 U.S. grade B steel. Welded connection plates shall be ASTM A-36 hot rolled steel. All welding performed to latest AWS standards by ASTM Certified welders and provided in accordance to same.

Tubular Steel Columns and Beams: Standard column dimensions shall be 5" x 5" tubular steel welded to 5/8" base plate (footing design provided separately). Horizontal column to roof connection beam is 5" x 5" tubular steel and roof framing shall be 5" x 2" tubular steel. Economy Version (EV) of this shelter model for less stringent design locations is available with smaller more economical member sizes.

Roofing: 24 Ga. pre-cut steel panels with Kynar 500 finish in a variety of colors with white underside. Standard roof slope is a 6/12 pitch with a eave height of 7'-2". Also available with 4/12 or 8/12 pitch roof. Alternate roofing materials include standing seam, asphalt shingles, cedar shake, or clay tile. Tongue & groove wood decking is also available.

Frame Finish: All steel framework will undergo a three step powder coat application that begins with welded raw steel being sand blasted to a white condition to eliminate contaminates and oils. Then a zinc-rich primer is applied and baked at 400°F, followed by a corrosion protective TGIC Polyester powder coat, electro-statically applied and cured at 400°F. A large selection of standard colors are available.

Hardware: All structural hardware provided and to be A-325 grade. Roof fasteners shall be engineered strength self tapping screws.


Shop Drawing: The fabricator shall furnish a complete set of installation drawings.


Warranty: 10 years against manufacturer defects.

Not Included: Concrete work of any kind, unloading of product and installation.

Additional Options:

- Flexibility of Design Such as: Height and Pitch
- Additional Engineering
- Variety of Colors
- Decorative Railings, Lattice, Braces, Trim, etc.
- Cupolas and Rooftop Accs.
- Column Style Variations
- · Lexan Wind Screens
- Tongue & Groove Roof Decking
- Asphalt Shingles, Standing Seam, Cedar Shake, or Clay Tile Roofing
- Composite Finished Ceiling
- Solar Panels & Solar Lighting
- Site Furnishings and Accs.

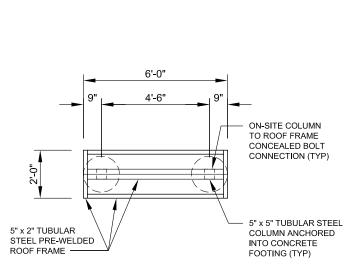

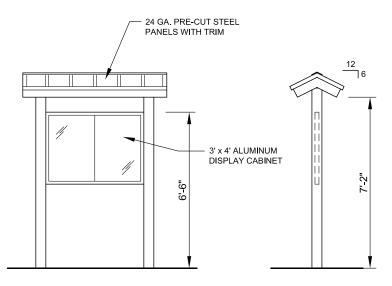

FRAMING PLAN SCALE: 1/4" = 1'-0" FRONT ELEVATION
SCALE: 1/4" = 1'-0"

SIDE ELEVATION
SCALE: 1/4" = 1'-0"



11800 East 9 Mile Road Warren, MI 48089 Office: (586) 486-1088 Fax: (586) 754-9130 Toll Free: (800) 657-6118 Email: info@coverworx.net www.CoverWorx.net Steelworx Gable Kiosk Shelter - 2' x 6'

Model: KG-0206-SW

DESIGN SPECIFICATIONS