Model: Steelworx Octagonal Shelter, 24', Model # OC-24-SW

Manufacturing Mission: To provide all prefabricated components and installation instructions for a 24' octangonal (measured from eave to eave) free standing bolt together, tubular steel constructed shelter kit.

Design Criteria: Structure is typically designed for a 30 lb live load and a 95-100 mph wind load capacity. All structural members are ASTM A-500 U.S. grade B steel. Welded connection plates shall be ASTM A-36 hot rolled steel. All welding performed to latest AWS standards by ASTM Certified welders and provided in accordance to same.

Tubular Steel Columns and Beams: Standard column dimensions shall be 5" x 5" x 3/16" tubular steel welded to 5/8" base plate (footing design provided separately). Perimeter and interior support beams are 5" x 5" to 5" x 7" with a thickness between 1/8" and 3/16" based on location and customer criteria. Economy Version (EV) of this shelter model for residential or less stringent design locations are available with smaller more economical member sizes.

Roof: Standard pitch is 4:12. Role formed metal roof decking is Kynar finished. 20 year warranted, 24 gauge ribbed steel attached to beams with engineered strength self tapping screws. Standing Seam and/or Multi Rib profiles available.


Frame Finish: Contaminates and oils are eliminated with welded raw steel being sand blasted to a white condition. Corrosion protective Polyester Powder coating electro-statically applied and cured to 450 degrees in our state of the art cure oven polyester power coating process. E-coat primer is also available at an additional charge.

Hardware: All structural hardware provided and to be A-325 or B7 as required.

Not Included: Concrete work of any kind, unloading of product and installation.

Additional Options:

- Flexibility of Design Such as: Height and Pitch
- Additional Engineering
- Variety of Colors
- Decorative Railings, Lattice, Braces, Trim, etc.
- Cupolas and Rooftop Accs.
- Column Surrounds and **Design Changes**
- Lexan Wind Screens
- Tongue & Groove Roof Deck
- Standing Seam Roofing Composite Finished Ceiling
- Solar Lighting




ELEVATION SCALE: NTS

24'-0"

1'-9"

1'-9"

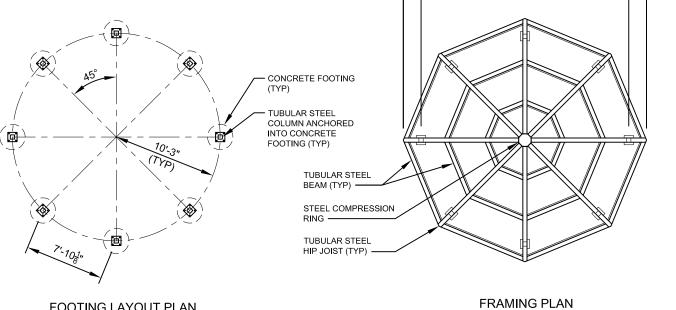



SCALE: NTS

FOOTING LAYOUT PLAN

11800 East 9 Mile Road Warren, MI 48089 Office: (586) 759-5490 Fax: (586) 754-9130 Toll Free: (800) 657-6118 Email: info@coverworx.net www.CoverWorx.net

Steelworx Octagonal Shelter - 24'

Model: OC-24-SW

DESIGN SPECIFICATIONS